
240 mm

190 mm


Installation method of base bracket

1

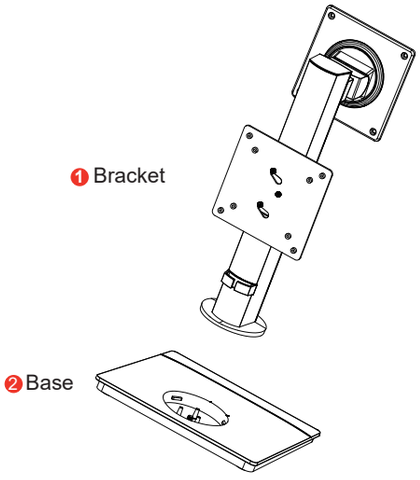


1、Take out the bracket and base from the cardboard box separately.

2

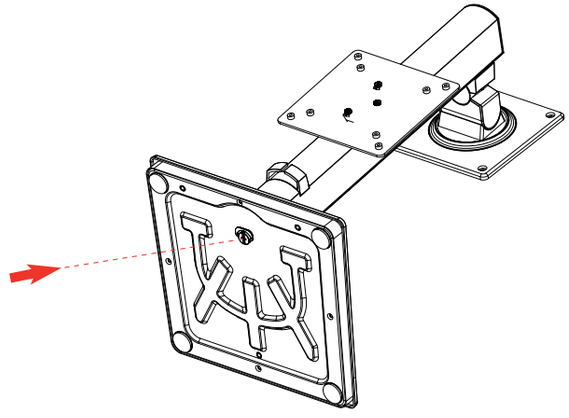


2、After aligning the bracket and base, tighten the bottom quick release screw.

3

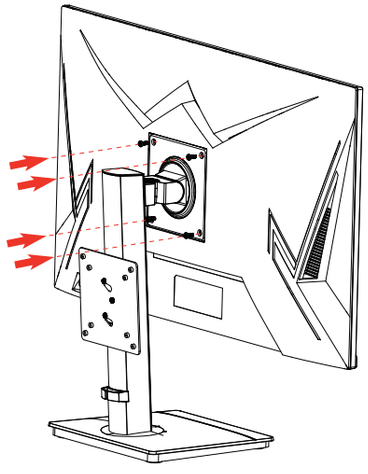

3、Remove the screws from the accessory package and secure the monitor to the base.


4

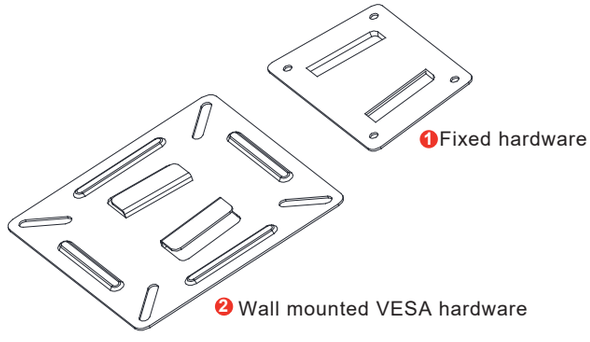


4、Remove wall mounted VESA hardware and fixed hardware from the packaging box.

240 mm


190 mm

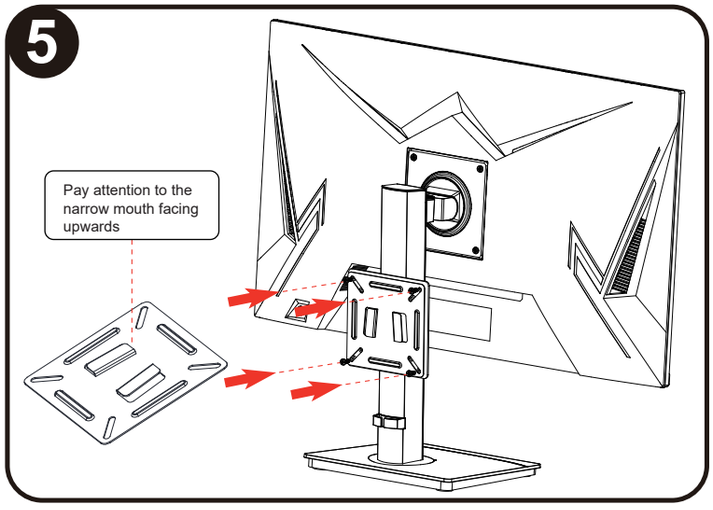


5、Use screws to secure the wall mounted VESA hardware to the wall mounting holes on the hardware support.

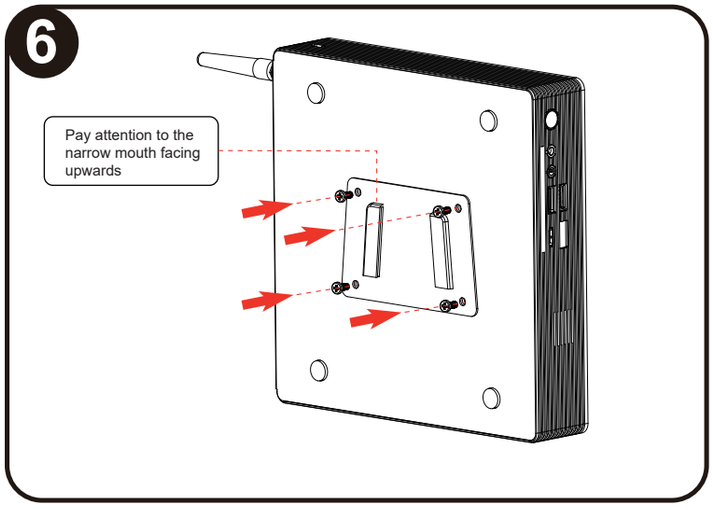

6、Remove the host and use screws to secure the wall mounting holes of the host with hardware.

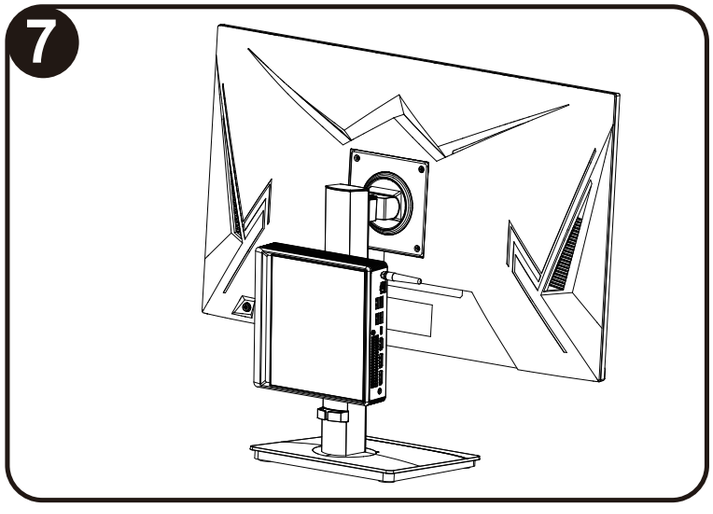

7、Install the host with fixed hardware onto the fixed wall mounted VESA hardware.

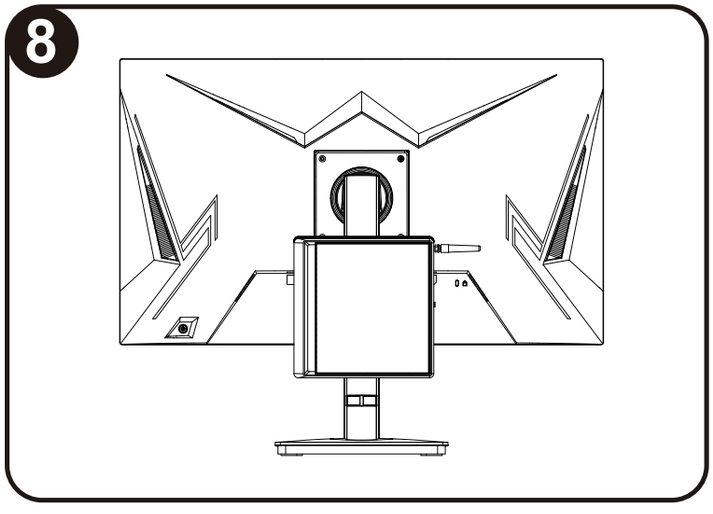

8、Adjust the angle of the monitor, insert the adapter cable into the power port and power it on for use.